

COMMANDO² 75[®]

HIGH PERFORMANCE DRY ICE BLASTERS

No job is too big for the new **COMMANDO[®] 75** All Pneumatic Dry Ice Cleaning Machine! With a large 75 lbs (34 kg) hopper capacity, the machine is built to blast all day long, making it the perfect choice for commercial cleaning professionals and for any cleaning applications requiring extended operation time. The COMMANDO[®] 75 is durable, reliable and ready to report for duty! Includes removable spun stainless steel hopper with the BlitzFeed[®] patented freezeless dry ice delivery system.

COMMANDO[®] 75 SPECIFICATIONS

- **Dimensions:** 35" (889 mm) L x 23¼" (591 mm) W x 38¼" (1 m) H
- **Weight:** 225 lbs (102 kg)
- **Hopper Capacity:** 75 lbs (34 kg)
- **Dry Ice Consumption:** 0 – 425 lbs/hr (0 – 193 kg/hr)
- **Operating Range:** 60 – 250 psi @ 85 – 375 CFM (2.4 – 10.6 m³)
- **Blasting Pressure:** 60 – 250 psi (3.4 – 17.2 bar)
- **Compressed Air Connection:** 1" JIC Fitting
- **Moisture Separator:** Included on machine
- **Adjustable blast pressure and pellet feed rate on control panel**
- **Noise Level:** 60 – 120 dB(A) (varies). Ear and eye protection required.
- **Warranty:** 1 Year Limited



Aggressive blasting nozzle shown in photo sold separately




BLITZFEED[®] FREEZELESS HOPPER DESIGN

The BlitzFeed[®] patented freezeless dry ice delivery system ensures a reliable ice feed. A heavy duty spun stainless steel hopper and built-in vibration, means no freezing up in the middle of a project!



DURABLE BLASTING GUN WITH LED LIGHT

Featuring a lightweight aluminum construction with a pistol grip handle and push-button safety. Safety start-up feature prevents accidental blasting gun activation when first turning on the machine.



MAXIMUM BLASTING POWER

The COMMANDO[®] 75 includes a 1" air intake line for an increased air flow capacity, providing maximum blasting velocity for heavy duty cleaning applications.



FIELD SERVICEABLE IN MINUTES!

The modular electrical box can be replaced in under 10 minutes and the blasting gun can be repaired easily in the field. Even complicated maintenance procedures take only about 30 minutes to complete!



INTUITIVE CONTROL PANEL

The "Central Command" control panel features easy-to-use controls for quick adjustment of blasting pressure, ice flow and emergency functions. A tough protective cover prevents damage to dials and gauges.



INDUSTRY LOW COST OF OWNERSHIP

Reliable performance, a modular design with field reparability, and competitively priced nozzles and accessories make COMMANDO[®] Dry Ice Blasters the most affordable machines to own in the industry.

INCLUDED WITH EACH MACHINE:

- Dry ice blasting unit
- Blasting gun plus one each: 5" round nozzle, 1" fan nozzle, nozzle extension and twist grip handle
- 25 ft (7.6 m) blasting hose with control cable and 50 ft (12.2 m) heavy duty air supply hose
- Ice Scoop
- Operation Manual

AVAILABLE BLASTING NOZZLES

Additional nozzles may be available



1" FAN NOZZLE IBN003
High-Flow Version: IBN003HFL
12" Long X 1" Wide Fan Nozzle



45 SPECIAL IBN045
45° Nozzle



AGGRESSIVE BLASTING NOZZLE AKA "THE HOWITZER" IB10G40
24" Long X 1" Aggressive Blast Nozzle



SHORT SPOT NOZZLE IB10G134
5" Round Nozzle



3" WIDE FAN NOZZLE IBN009
12" Long X 3" Wide Fan Nozzle



HD BLAST BARREL AKA "THE THUMPER" IBNMCBB
Multi-choke Blast Barrel with 3 Chokes



90 SPECIAL IBN090
90° Nozzle



PELLET FRAGMENTER IBFN007
Shatters Dry Ice Pellets for Delicate Cleaning




500 CFM PORTABLE AFTERCOOLER



Engineered to handle the most demanding dry ice blasting applications, the **Command Air® 500** efficiently cools, filters and dries the hot moist air produced by diesel air compressors and supports up to two compressors and blasters simultaneously. The aftercooler features self-purging automatic drains, a robust steel frame and airless tires for easy mobility. It's the ideal solution for supplying dry ice blasters or any other equipment requiring cool, dry air for operation.



- Pressure Rating: 250 psi max
- Flow Capacity: 500+ SCFM @ 250 psi
- Filtration: Coalescing filter to .7 micron
- Max Inlet Temperature: 250°F (121° C)
- Fan Motor Supply: 25 CFM @ 35 psi max
- Moisture Drainage: Self-purging, automatic
- Weight: 180 lbs (82 kg)
- Inlet Size: 1.5" NPT F
- Outlet Size: 1.5" NPT F
- Dimensions: 45" (1143 mm) H x 32½" (826 mm) W x 19" (483 mm) D

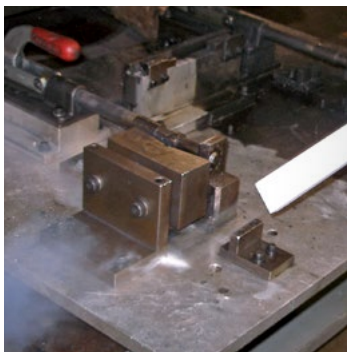

DRY ICE BLASTING APPLICATIONS *Removes oils, grease, inks, films, mold and more!*

- Sanitary cleaning of food processing equipment
- Weld cell cleaning, incl. automation equipment
- Production and packaging equipment
- Ventilation systems
- Automotive parts
- Tire and rubber molds
- Core boxes, aluminum molds
- Commercial printing presses
- Fire and historical restoration
- Mold remediation
- Paper mills and paper related manufacturing
- Electrical and power generation equipment
- Asphalt and concrete paving equipment
- Cemeteries and monuments
- Removal of fiberglass resin
- Restaurants and bakeries — grills, ovens, vents
- Dry docking — commercial and military
- Commercial and military aircraft
- Wine barrels
- Graffiti removal